Lagom 4 Steel





Lagom 4 Steel

The Lagom's 4kW modern cylindrical body stove with curved glass door is certain to draw admiring looks. This high efficiency, low emission wood burning stove is Ecodesign Ready

The Lagom features integrated lower storage areas convenient for tucking away kindling, operating tool or safety gloves.

Features

- Ecodesign Ready
- 10 year guarantee
- Black steel body style
- Handy integrated storage area
- Self-closing door
- Simple, discreet air controls
- Top or rear 6" flue outlet
- Direct air compatible



Lagom 4 Steel

Dimensions

| Width | 528 mm |
|------------------|--------|
| Height | 974 mm |
| Depth | 398 mm |
| Ideal log length | 250 mm |



Simple air controls




Smart storage area



Discreet ash pan access

Lagom 4 Steel

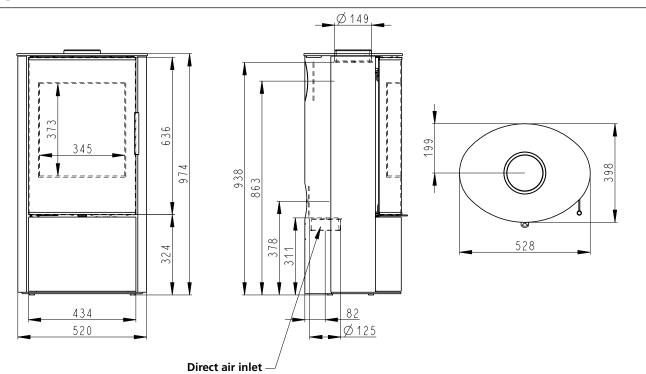

Dimensions

| · · · · · · · · · · · · · · · · · · · | |
|---------------------------------------|--------|
| Width | 528 mm |
| Height | 974 mm |
| Depth | 398 mm |
| Flue Diameter | 149 mm |
| Depth from back to centre of top flue | 199 mm |
| Axis height of rear flue | 863 mm |
| Ideal log length | 250 mm |
| | |

Features

| Stove body type | Freestanding |
|--|--------------|
| Ecodesign Ready | Yes |
| Approved for smoke control areas | No |
| Suitable for direct air connection | Yes |
| Suitable for non-combustible 12mm hearth | Yes |
| Weight gross (packed kg) | 123 Kg |
| | |

| Performance | Wood Fuel |
|--------------------------------|------------------------|
| Energy Efficiency Class | A+ |
| Nett Efficiency | 80.5 % |
| Nominal Output | 4.0 Kw |
| Mean Co Emission (@13% O2) | 1192 mg/m ³ |
| Mean CO2 Emission | 9.59 % |
| DIN+ particulate | 15 Nmg/m3 |
| Mean NOx Emission (@13% O2) | 111 Nmg/m3 |
| Mean OGC Emission (@13% O2) | 68 Nmg/m3 |
| Flue Gas Mass Flow | 4 g/s |
| Flue Gas Temperature | 247 °C |
| Average wood consumption | 1.2kg / hr |

Minimum distance to combustibles

| | With single-walled flue fitted |
|------|--------------------------------|
| Rear | 100 mm |
| Side | 100 mm |
| Тор | 1200 mm |

Direct air spigot location

(when viewing the rear side of the stove)

| Spigot diameter | 125 mm |
|-------------------------|----------|
| Spigot orientation | Vertical |
| Height from floor | 311 mm |
| Axis distance from rear | 82 mm |
| Lateral position | Centre |

We recommend this appliance is installed with clearance of 100mm to non-combustible materials Installation and operating instructions for this stove are available online at www.aradastoves.com.